


## Hi-FLEXi C Series

- DC inverter-driven compressor
- Low noise technologies
- Compact and lightweight design
- Long refrigerant pipe and drop




## Top-class Compact and Light Weight Design

Facilitation and flexibility at installation are further advanced by adopting outdoor units light weight and compact design compared to the current top-flow model.

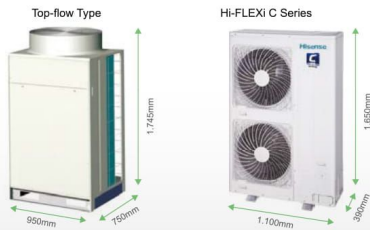

## Technology to Improve Heat Exchanger Performance

In the Hi-FLEXi C series model, wind speed distribution is rendered uniform by making the direction of the wind flow same to the fan and the heat exchanger. As a result, the performance of the heat exchanger is optimized and energy is saved.

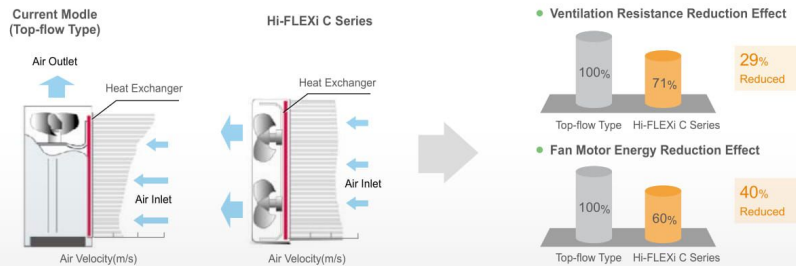

## Low Noise Technologies

### DC Fan Motor

The smooth rotating fan motor with low vibration reduces the noise level.

### Super High-stream Fan

Super high-stream fan of  $\Phi 544\text{mm}$  cuts down the noise level.

### Low Pressure Loss Air Outlet Grille

The rib structure synchronized with rotation flow from the fan reduces the air resistance at the air outlet grille.


### New Fin with Less Pressure Loss

The draft resistance is reduced by 20%. Both high-efficiency and low noise operation are simultaneously satisfied.



## Various Model Types Easily Match Different Layout

Wide capacity range of outdoor units enables free model combination of indoor units according to the actual situation of building. There are 12 types of indoor units for selection. Designer can choose the appropriate type and capacity of indoor units according to the interior decoration and furnitures.

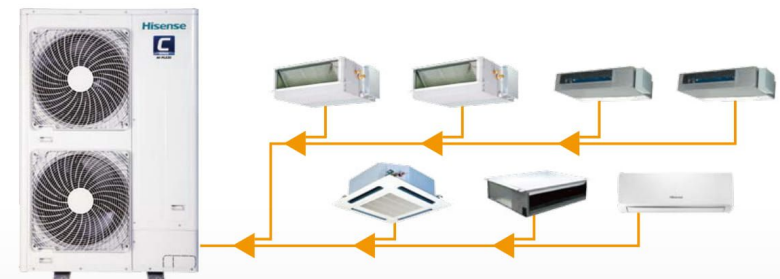

## Hi-Smart L Series

Hisense Hi-Smart L Series is designed and developed for high-end residential and commercial space.

- DC inverter-driven compressor
- Low noise technologies
- Compact and lightweight design
- Long refrigerant pipe and drop




## Slim and Refined Body Design

The compact outdoor unit can be flexibly placed according to outdoor condition. Low-height ducted type can be easily installed inside the low-height residential ceiling with a height of 192mm, which makes low height indoor units and elegant home decoration style set off mutually.



## Free Combination

One outdoor unit of Hi-Smart L series can connect maximum 9 indoor units in different types. The free combination not only meets the air condition needs of large space, but also helps to match the indoor decoration. Flexible choice and better system configuration start a tour of luxury life.

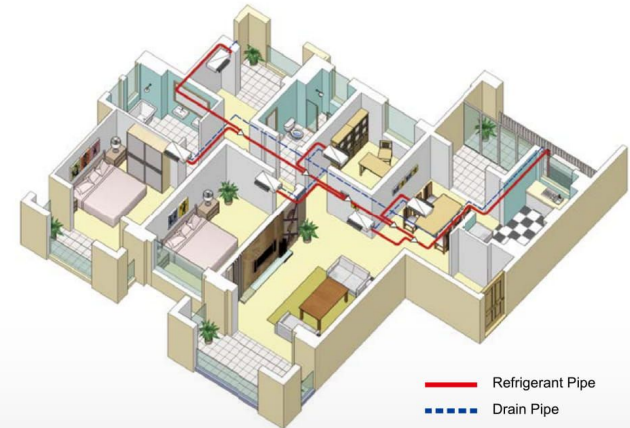

## Long Piping Design

Long refrigerant piping design makes project design and installation works more convenient. When it need to be connected with compact 4-way-cassette or wall type, please consult our professional engineer.

- Total piping length can be 120m.
- Max. piping length is 75m.
- Max. height difference between outdoor and indoor units is 30m.
- Max. height difference between the highest and the lowest indoor units is 10m.

